MEGAMAN®
spaarlampen
www.megaman.nl

TEKA

TEKA

Outdoor Lighting

MM01315

IP66

MM01318 - GU10

NEW

Industry Standards

Europe
EN60598-1
EN60598-2-1

Features:

- For outdoor use with adjustable body
- Delivers light with 15W TUBULAR lamp (MM01315) and 7 or 9W GU10 (MM01318)
- Offers 15,000 hours service life with built-in electronic ballast in lamp
- Offers visual comfort without glare
- With IP66 protection

Materials & Finish
Body
- Material : Plastic
- Glow wire protect : 670°C

Reflector
- Material : Aluminium
- Finish : Faceted Aluminised

Glass
- Material : Tempered Glass
- Finish : Transparent

Cable
- Type : H05RN-F 2 x 1.0mm²
- Length : 1.5M

Plug Type
- EU
- BSI
- CN

Installation Methods
- Spike-standing

Applications
- Gardens
- Driveways
- Paths

Body Colours and Finishing
- Black

Available in the following colours

Black

Complete set comes with:

Recommended Lamp MM01315:

MM33112
E27 / 15W - 2700K

MM33115
E27 / 15W - 6500K

Recommended Lamp MM01318:

MM14122
GU10 / 7W - 2700K

MM14123
GU10 / 7W - 3000K

MM14124
GU10 / 7W - 4000K

MM14126
GU10 / 7W - 6500K

MM14132
GU10 / 9W - 2700K

MM14133
GU10 / 9W - 3000K

MM14134
GU10 / 9W - 4000K

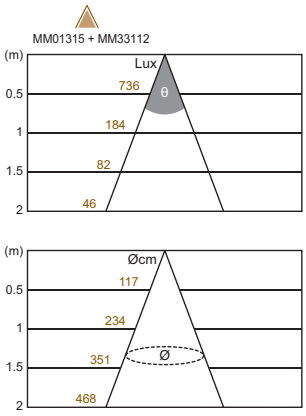

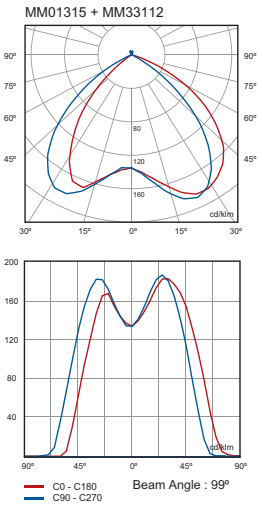





Measurements

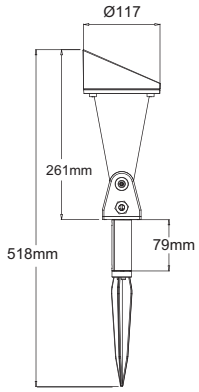

MM01315





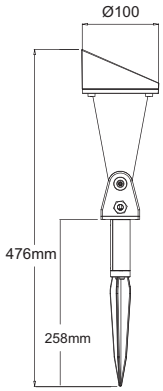

MM01318

Specifications

Model No.	MM01315	MM01318
Maximum Wattage(W)	15	9
Voltage(V)	230~240	230~240
Frequency(kHz)	50/60	50/60
Lamp Holder	E27	E27
No. of Lamps	1	1
Max. cd	184	65
Beam Angle(°)	99	86
Light Output Ratio		
- ULOR	--------	--------
- LLOR	42	50
Measurements(mm)	Ø117 x H518	Ø110 x H476
Weight(g)		
- luminaire only	475	230
- luminaire with lamp	537	282
IP Protection	IP66	IP66
Recommended lamp	MM33112 / MM33115	MM14122 / MM14132
Power Supply	--------	--------
Power Cable	H05RN-F 2 x 1.0mm²	H05RN-F 2 x 1.0mm²
Standard Pack	12(1)	12(1)

ingenium®

- 15,000 hrs lifetime
- 600,000 switching cycles
- Shorter preheating time